

BALDWIN®

DEADBOLTS



RESERVE™

BALDWIN®

DEADBOLTS



Traditional Arch
(TAD)



Traditional Round
(TRD)



Contemporary Round
(CRD)



Rustic Arch
(RAD)



Traditional Square
(TSD)




Contemporary Square
(CSD)



Rustic Square
(RSD)

DEADBOLT SPECIFICATIONS

Door Preparation	2-1/8" cross bore. 1" edge bore for latch.
Door Thickness	1-3/4" to 2" standard. Thick door optional for doors up to 2-1/2". 1-3/8" to 1-3/4" thin door option available for Traditional and Contemporary styles only. Thin door option not available with Rustic Deadbolt styles.
Cylinder	Baldwin 5-pin C-Keyway standard. SmartKey® Re-key Technology optional.
Backset	Adjustable 2-3/8" or 2-3/4".
Front & Latch	Square Corner Adjustable (SL) standard. Round Corner (RL), Drive In (DL), or 6 Way Adjustable (6L) optional.
Strike	Square Corner (SS) standard. Round Corner (RS), Dual Strike (DS), or Full Lip Strike (FS) optional.
Latch Bolt	Deadbolt features 1" throw brass bolt.
Handing	Handing not required.
ANSI/BHMA	Tested to exceed ANSI/BHMA Grade 2 security.
ADA	N/A
UL	20-minute certified UL option available.

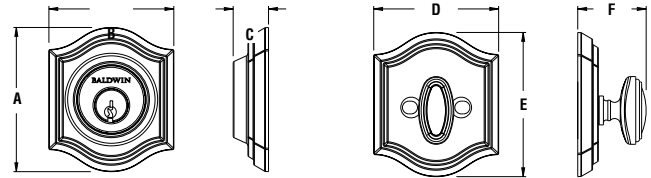

DEADBOLT DIMENSIONS

	TAD	TRD	TSD	CRD	CSD	RAD	RSD
A	3-1/16"	Ø 2-3/5"	2-3/5"	Ø 2-5/8"	2-9/16"	3-5/8"	3-1/8"
B	2-11/16"	N/A	2-3/5"	N/A	2-9/16"	2-11/16"	2-9/16"
C	3/4"	3/4"	3/4"	3/4"	3/4"	1-1/16"	1-1/16"
D	2-11/16"	Ø 2-5/8"	2-5/8"	Ø 2-5/8"	2-5/8"	2-11/16"	2-5/8"
E	3-1/16"	N/A	2-5/8"	N/A	2-5/8"	3-7/16"	2-5/8"
F (SC)	1-7/16"	1-7/16"	1-7/16"	1-7/16"	1-7/16"	1-7/16"	1-7/16"
F (DC)	3/4"	3/4"	3/4"	3/4"	3/4"	1-1/16"	1-1/16"

FINISH AVAILABILITY

	003	049	112	141	150	152	260	481	492
TAD	•	•	•	•	•	•	•		
TRD	•	•	•	•	•	•	•		
TSD	•	•	•	•	•	•	•		
CRD			•	•	•		•		
CSD			•	•	•		•		
RAD								•	•
RSD								•	•

FUNCTIONS



Single Cylinder
(SC)



Double Cylinder
(DC)

FINISHES



LIMITED LIFETIME MECHANICAL • 25-YEAR FINISH WARRANTY