

# BALDWIN

Handleset used with Keyless Entry Deadbolt  
Installation Instructions

**Congratulations!** With your purchase of this Premium Entrance Set, you're among a group of discerning individuals who know the intrinsic value of selecting the finest—Baldwin.

Our step-by-step installation instructions will help guide you through your project quickly and easily.

Before you begin your installation, read and understand the installation instructions and marking templates. If you have any questions, please do not hesitate to contact our Baldwin Consumer Help Line at 1-800-566-1986. We're here to help! We thank you for your purchase and wish you the fullest enjoyment of your Baldwin product.

**WARNING:** Do not attempt to clean your hardware with any type of abrasive cleaners, solvents, or chemicals. These types of cleaning agents may mar the finish. A damp cloth is all that is necessary to wipe clean.

Note: Finish Number 102, Oil-Rubbed Bronze, can be cleaned with light machine oil and wiped with a dry cloth.

**Consumer Help Line**  
**1-800-566-1986**

Hours: 8 a.m. to 8 p.m. E.S.T. — Monday - Friday  
10 a.m. to 6 p.m. E.S.T. — Saturday

If you have trouble installing your Baldwin product, feel free to call our toll-free Consumer Help Line.

## BEFORE YOU BEGIN

- **This product does not contain deadbolt components and is to be used with a Baldwin Keyless Entry Deadbolt. Please refer to the Keyless Entry Deadbolt product for installation instructions.**
- Remove and discard all materials and screw(s) used for packing your Premium Entrance Set. Verify that you have all parts pictured on exploded view section of instructions.
- Follow the step-by-step sequence to ensure proper operation of your Baldwin lockset.
- If your door is pre-drilled, skip Door Preparation.
- We recommend spreading cardboard over floor to prevent scratching parts and marring floor.
- Always wear protective eye wear.

fold line

## TROUBLESHOOTING GUIDE

If parts are missing do not return product. Please call Baldwin's Consumer Help Line at 1-800-566-1986 and we will quickly send the parts to you.

**SCREWS ARE ALL TIGHT BUT THE HARDWARE IS NOT FIRMLY ATTACHED TO THE DOOR.**

Check door thickness. Door must be 1 - 3/4" thick. Hardware will not install on doors less than 1 - 3/4" thick.

**KNOB OR LEVER KEEPS COMING OFF THE SPINDLE.**

Ensure that set screw on knob or lever is installed in V groove on spindle and securely tightened with Allen wrench provided. Refer to handleset installation step 5.

**DOOR IS DIFFICULT TO LATCH OR WILL NOT STAY CLOSED.**

Strikeplate is not aligning with latchbolt. Remove, plug holes with wooden dowels and glue. Adjust and re-install. Condition can also be caused by weather stripping being installed after hardware is installed. Re-install strike as described at left. Refer to strikeplate installation step 1.

## WARRANTY INFORMATION

### LIMITED LIFETIME MECHANICAL WARRANTY

Baldwin warrants that each Baldwin product shall be free from mechanical defects at the time of delivery and for the lifetime of the product or as long as you own your home.

### LIMITED LIFETIME FINISH™ WARRANTY

The Baldwin Lifetime Finish™ uses advanced finishing technology (physical vapor deposition) to create a finish highly resistant to the effects of weather and normal wear and tear. The Limited Lifetime Finish Warranty on Lifetime Finish™ products covers the original purchaser for as long as you own your home.

### LIMITED FINISH WARRANTY

The finish on Baldwin products (excluding Lifetime Finish and living finish products) is protected by a durable topcoat designed to maintain the beauty and quality of the Baldwin product. The Baldwin Limited Finish Warranty covers the original purchaser for five years from date of purchase for interior use and one year for exterior use.


### LIVING FINISHES

Due to the nature of Baldwin living finish products, they will wear over time and may already have begun the process before reaching your home. No finish warranty is offered on living finish products, which are designed to age and improve over time. Living finishes include raw brass, oil rubbed bronze, stainless steel, and other non-lacquered or non-PVD finishes.


**REFER TO WWW.BALDWINHARDWARE.COM FOR A COMPLETE WARRANTY STATEMENT.**

fold line

## DOOR PREP

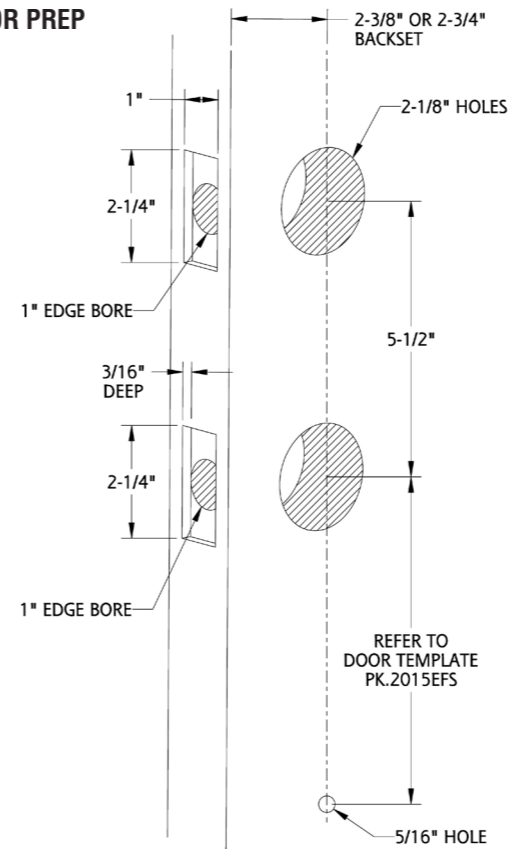


## EXPLODED VIEW

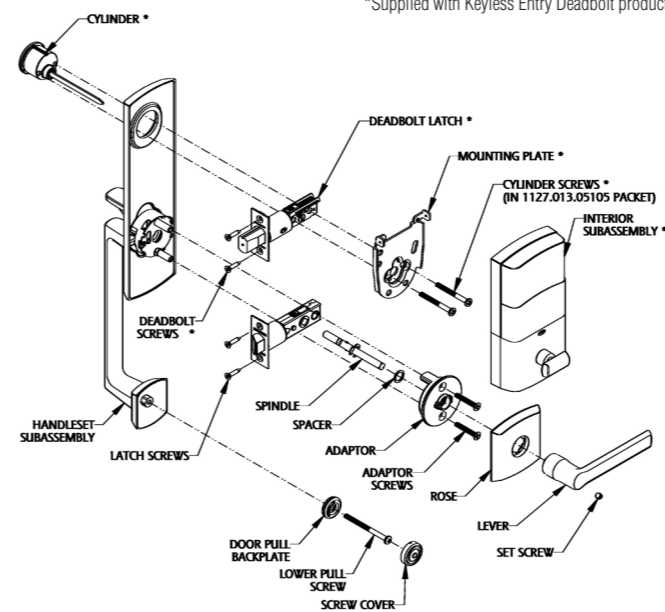

fold line


## EXTERIOR TRIM

1. Install latch (A) with latch screws (B). Predrill screw holes for ease of installation using 1/8" bit.
2. Secure exterior subassembly (C) with retainer (D) and lower pull screw (E).

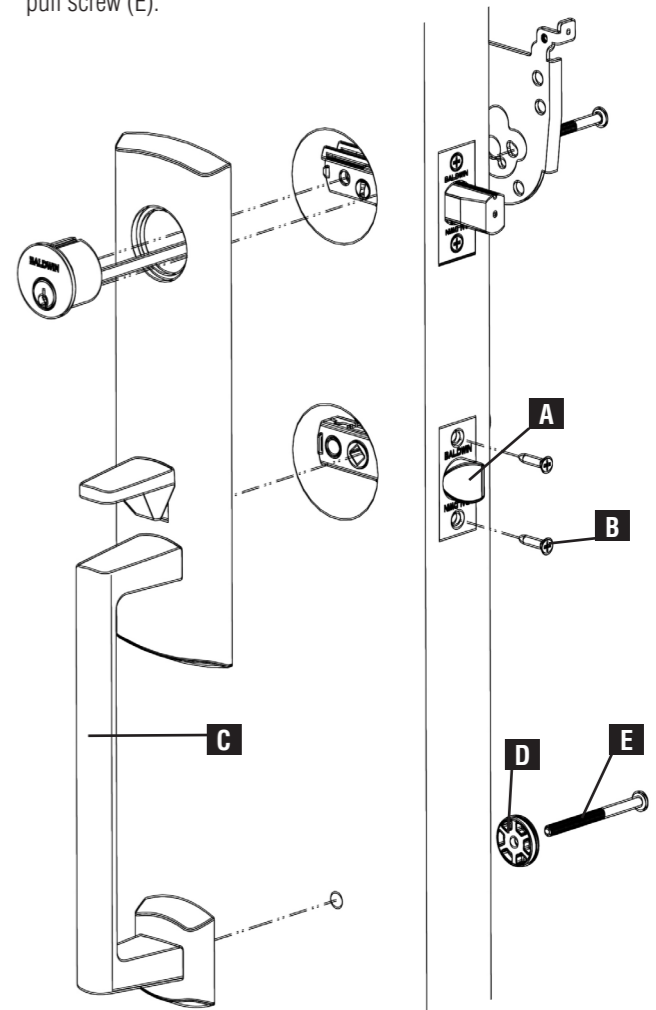

### ADJUSTING BACKSET

Grasp faceplate and rotate 180° for 2-3/4" backset.





fold

## INTERIOR TRIM

- Place spindle (F) into latch (A) with the V-groove pointed to the hinge side of door (see view). Slide spacer (G) over spindle (F).
- Install adaptor (H) over spindle (F) and secure with adaptor screws (J)
- Test operation of handleset. If latch does not operate smoothly, loosen screws (E) and (J) and gently lift up the exterior subassembly while retightening (J) screws. Test operation again.
- Snap rose (K) onto adaptor. See alternate rose configuration when applicable.
- Slide lever (L) onto spindle and secure with set screw (M) using supplied allen wrench (Q).
- Tighten (E) screw and snap screw cover (P) over retainer (D).

### See Deadbolt Installation Section

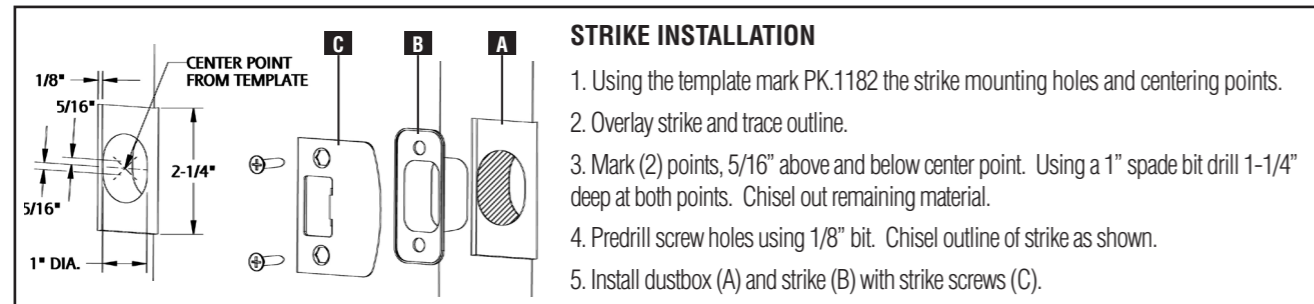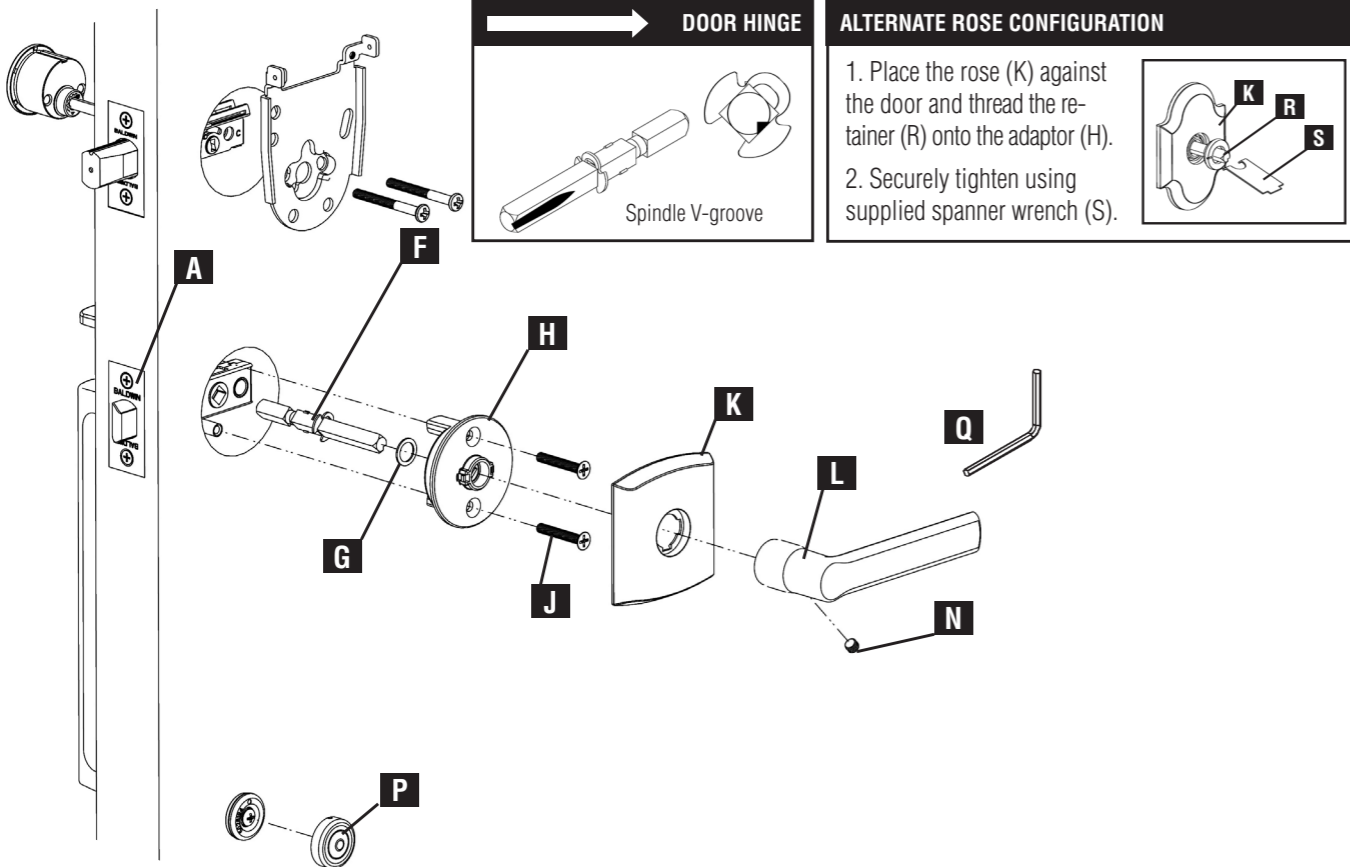

## STRIKE INSTALLATION

- Using the template mark PK.1182 the strike mounting holes and centering points.
- Overlay strike and trace outline.
- Mark (2) points, 5/16" above and below center point. Using a 1" spade bit drill 1-1/4" deep at both points. Chisel out remaining material.
- Pre-drill screw holes using 1/8" bit. Chisel outline of strike as shown.
- Install dustbox (A) and strike (B) with strike screws (C).

## DEADBOLT INSTALLATION (requires Keyless Entry Deadbolt)

- Assemble the cylinder, mounting plate and screws as shown.  
\*Check the vertical alignment for mounting plate (See Figure 1)
- Using the key, retract and extend the bolt a few times to test for smooth action.  
\* If action feels rough:
  - Refer to Step 3
  - Loosen cylinder screws and re-align the mounting plate (See Figure 1)
  - Test operation of deadbolt and handleset
- Securely tighten all handleset and deadbolt screws.
- Install the interior subassembly from the Keyless Entry Deadbolt. Once flush on door, insert and tighten small screws to secure assembly onto the mounting plate (See Figure 2)

**Important before proceeding:**

- Verify that position #2 (Auto-Lock feature) of the "Settings Switch" is in the OFF position. (Refer to section 10 of Pk.9008)
- Work with the door open (away from jamb) to avoid accidental lock out.
- Make sure the bolt is in the extended (locked) position.

- Install batteries into battery pack.
- Automatic - Bolt Direction Determination Door Handing** (See Figure 3)
  - Press and hold the Program button
  - Insert battery pack
  - The lock buzzer will sound once
  - Release the Program button to enter the Test mode
  - Momentarily press the Program button  
The lock will proceed with the Door Handing operation

**The Keyless Entry Deadbolt mechanism automatically determines the "door handing" and sets the proper direction for the motor to rotate. The system will drive the bolt several times during this process.**

Refer to Keyless Entry Deadbolt product for the Home Connect (HOME AREA NETWORK (HAN)) instruction sheet for additional programming.

