



Pegasus™ 17'x10'

Instructions apply to Part Number 9161-171C

POLE ASSEMBLY PARTS

When You Are Ready To Set Up Your Tent


- Select a level campsite clear of rocks, branches and other hard or sharp objects.
- Do not set up your tent under trees.
- For best results in windy conditions, position the end of tent into the wind.

(2) Main Tent Poles (Black)	Part No. 9161-1051	<hr/> <hr/>
(2) Side Poles (Gray)	Part No. 9161-1061	<hr/> <hr/>
(1) Rainfly Main Pole	Part No. 9161-1071	<hr/>
(2) Rainfly Side Poles	Part No. 9161-1081	<hr/> <hr/>

Rainfly Part No. 9161-1091


1 Layout & Positioning of Tent, Pole Assembly

- Layout and position tent with front door facing desired direction. (illus. 1)
- Unzip door.
- Stake down tent corners only, using the stake loops. Keep the floor taut. (illus. 2)(Intermediate loops will be staked later.)
- Assemble main tent poles by interlocking shock-corded poles. (two poles)
- Insert the main poles into pole sleeves. The poles should cross forming an "X" in the middle of tent. (illus. 1)

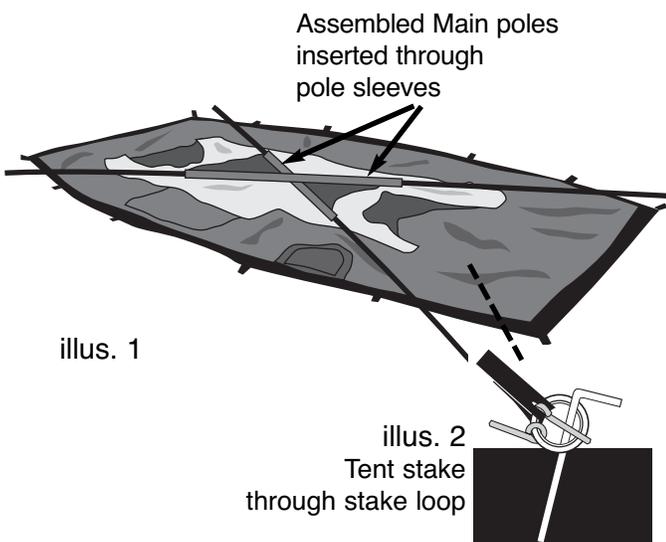

2 Connect Frame to Tent

- Insert pin near tent corner into the end of main tent pole. (illus. 3, illus. 4)
- Go to opposite end of pole and gradually apply pressure to the pole forming an arch until you are able to insert the pin into the pole end. Repeat for second main pole. (illus. 3, illus. 4)
- Assemble gray side shock-corded poles and insert through side pole sleeves. (illus. 4)
- Insert one pin into the end of side tent pole at tent center. (illus. 3, illus. 4)
- At the opposite pole end gradually apply pressure to the pole forming an arch until you are able to insert the pin into the pole end. Repeat for second side pole. (illus. 4)

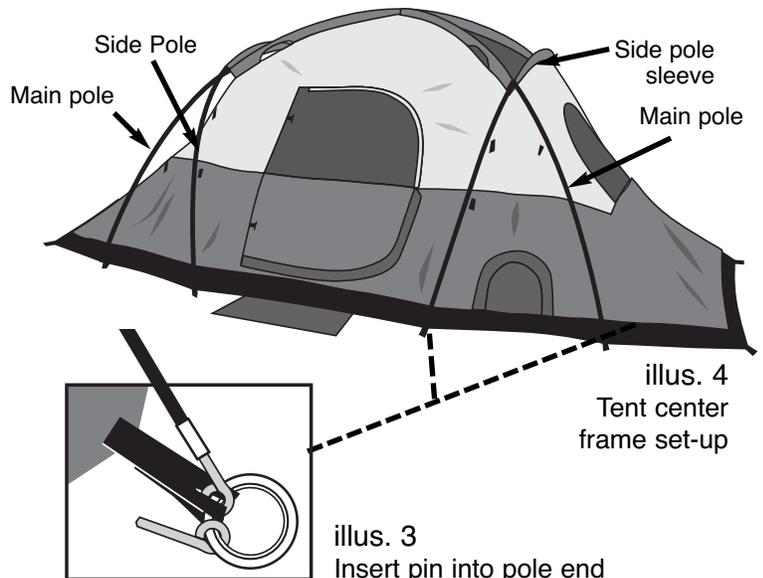

3 Attach Frame Clips


- Attach frame clips to frame poles. (illus. 5, 6)
- Stake out all additional loops.



illus. 5 Assembled tent without rainfly. Note the frame clips located on edge of tent.

4 Attach Rainfly

- Assemble rainfly pole by interlocking shock-corded pole.
- Insert main rainfly pole into reinforced pockets located at the center edges of the underside of rainfly. (illus. 7), (illus. 8)
- Attach rainfly pole to the underside of rainfly with the pole ties. (illus. 8)
- Insert the two rainfly side poles through the pole sleeves at the sides of the rainfly. (illus. 7)
- Drape rainfly over tent frame, pole side down. Main rainfly pole should point out over door and rear window.
- Connect the four elastic loops with “S” hooks, (found at the rainfly corners) to rings at end of poles (illus. 9)
- Secure rainfly with attachments located on underside of fly. (illus. 8)
- Insert the tips of the side rainfly poles into the grommets on either side of the side windows.(illus. 9)

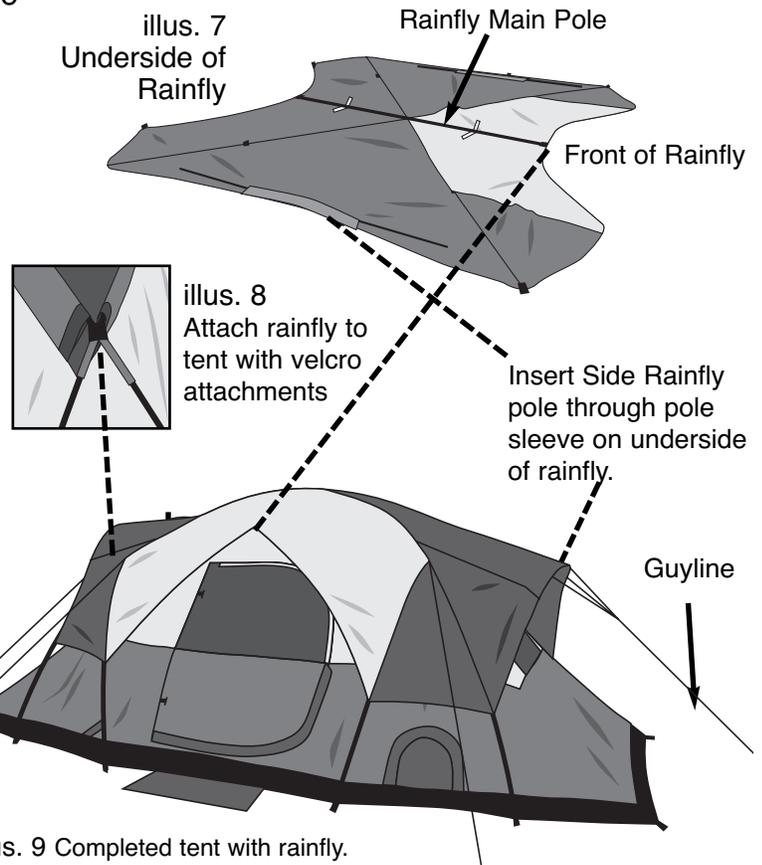

illus. 9 Completed tent with rainfly.

Things You Should Know

- Under certain conditions (cold weather, high humidity, etc.) condensation will form on the inside surfaces of your tent. Condensation is caused by water vapor from your breath, perspiration, or any wet clothing inside your tent. It is NOT LEAKAGE through the tent fabric. It can be minimized by removing wet clothing from your tent and by providing good ventilation through the tent.

- Never store tent, even for a short period of time, without drying it thoroughly and brushing off caked dirt. Do not pack stakes or poles inside your tent. Use a separate storage bag.

- STAKES SHOULD BE REMOVED BY PULLING ON THE STAKE ITSELF. NEVER PULL ON THE TENT FABRIC OR TENT STAKE LOOP TO REMOVE STAKE.

- TENT POLES SHOULD NOT BE LEFT TELESCOPED TOGETHER DURING STORAGE.

- Do not leave your tent set-up for weeks at a time, be aware that exposure to the ultraviolet rays of the sun can seriously damage material and/or cause it to become discolored.

WARNING: KEEP ALL FLAME AND HEAT SOURCES AWAY FROM THIS TENT FABRIC. This tent meets the flammability requirements of CPAI-84. The fabric may burn if left in continuous contact with any flame source. The application of any foreign substance to the tent fabric may render the flame-resistant properties ineffective.



THE COLEMAN CO., INC.

3600 N. Hydraulic • Wichita, Kansas 67219

1-800-835-3278 • www.coleman.com

MADE IN CHINA