

# INSTALLATION INSTRUCTIONS

1. Before removing door, mark desired position for unit on bottom of door. (Fig. 1)

Remove door by pulling hinge pins.

Hint .. position flat screw driver to catch top of pin and tap upward with hammer.

2. Use supplied "Door Hole Template" to trace entrance hole outline. (Fig. 2)

Use jigsaw to carefully cut entrance hole.

3. Use the supplied screws to fasten the frames to the door :

A. Place one frame underneath the opening (Back-Side up).

Position it so that you can see all four holes. (Fig.3a)

B. While holding this frame underneath the opening, place the other frame (Front-Side up) on top of the opening. (Fig. 3b)

C. Insert two screws in the large counter sunk holes in the top frame and tighten slightly. Continue to tighten these two screws until the frame assembly is snug to the door. (Fig 4)

E. Flip the door over and fasten the remaining two screws the same way..

Note... Check to make sure the frame assembly is properly aligned on the door before tightening all four screws. Do not over-tighten the screws - only tight enough to hold the frame assembly in place.

4. Fold the brush so that it matches the shape of the frame and insert the middle of brush into top of frame opening. Press the brush into place so that tabs on back of brush rest on lower screws.

Note ... If brush does not fit into the space between the frames - you may have to loosen the screws slightly.

5. Reinstall the door by inserting the top hinge-pin first.

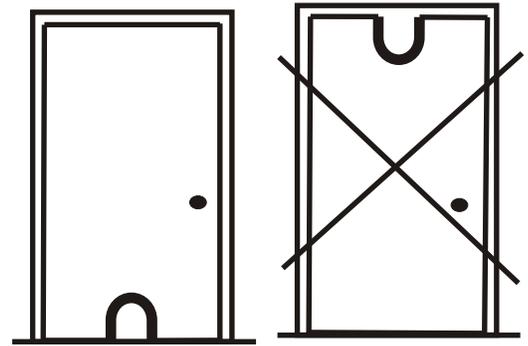


Fig. 1




Fig. 2

Hold one Frame underneath door (Bottom-side up)




Fig. 3a

Place other frame on top of door (Top-side up)



Fig. 3b

Two Screws from each side




Fig. 4

**NOTE: Installation Photos can be viewed on ...**  
**Http://www.CAT-DOOR.net**