
Pfister

Serrano[™]

Single Control Lavatory Faucet


GT42-SROC Finish(CC) GT42-SROK Finish(KK) GT42-SROY Finish(YY) GT42-SR5C Finish(CC) GT42-SRLC Finish(CC)

Code Compliance



- Single Control
- 3-Hole Installation
- Pforever Seal

- IAPMO Certified
- CSA B125 Certified
- ASME A112.18.1
- NSF 61/9 Annex G (Low lead)
- Cal Green Compliant
- EPA WaterSense Certification 1.5 gpm, 5.7L/Min
- ADA Compliant-ANSI A117.1 (Lever handles only)

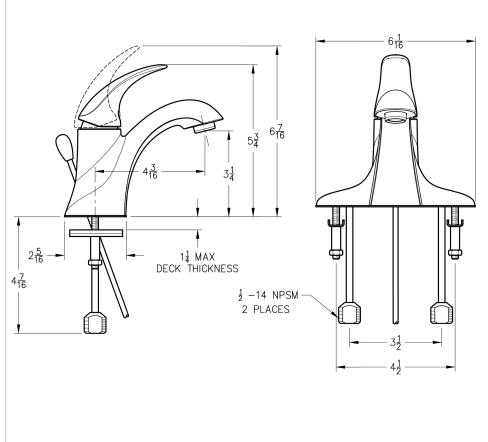

Metal Pop-Up 21 DIA 1³/₄ MIN TO 2⁵/₁₆ MAX 11 DIA

بل الم ا

 $3\frac{5}{16}$

4<u>9</u> 16

- 1<u>1</u> DIA

10358-01

Ø1 Min to Ø1-1/2 Max. Deck Hole Openings

Copyright © 2013, Pfister Inc.

October 30, 2013

Dimensions

- Pforever Seal Ceramic Disc Valve Includes Metal Supply Nuts Pforever Warranty[®]
- 3-Hole Installation

Features

Lever Handle

Specifications

- Less Pop-Up (SRLC Only)
- Metal Pop-Up (SRO* Only)
- 50/50 Pop-Up (SR5C Only)
- Not Drilled (SRLC Only)
- Decorative Arc Spout
- Fixed Spout



Pfister products are designed and manufactured in compliance with the following standards and codes: