


F-036-3GFS Finish(SS)* ☐

F-036-4GFS Finish(SS) ☐

F-036-4GFY Finish(Y) ☐

*International Only



Specifications

Features

- 3 or 4-Hole Installation
- High Arc Spout
- Installs With or Without Side Spray
- 360° Swivel Spout
- TiteSeal™ Deck Plate
- Tri-Flow™ with Eco Option
- Pforever Seal Ceramic Disc Valves
- Pforever Warranty®



Code Compliance

Pfister products are designed and manufactured in compliance with the following standards and codes:

- IAPMO Certified
- CSA B125 Certified
- ASME A112.18.1
- NSF 61/9 Annex G (Low lead)
- Cal Green Compliant
- ADA Compliant-ANSI A117.1 (Lever handles only)



Dimensions

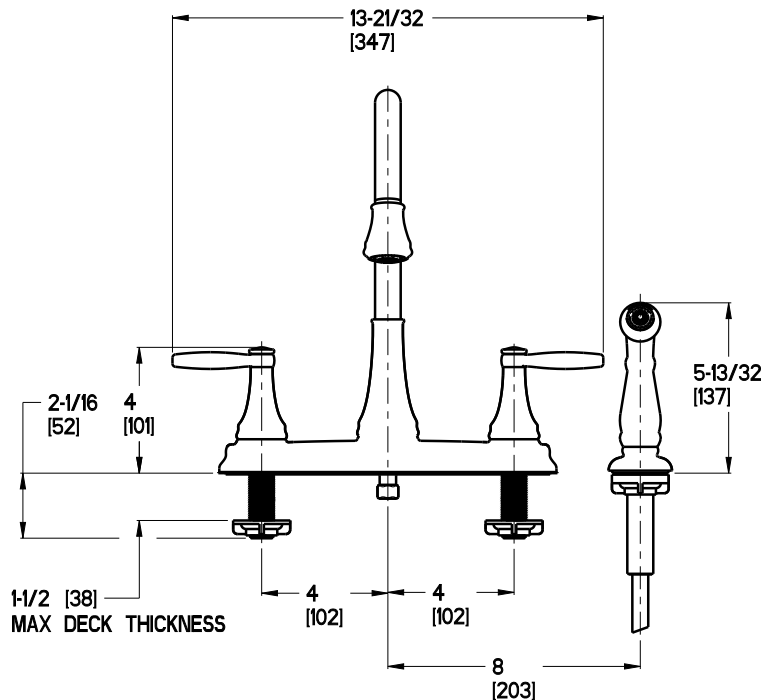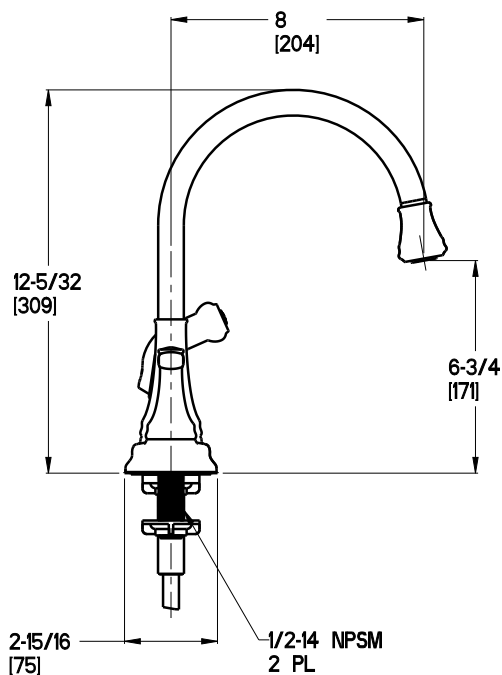

Ø1-3/8 Min to Ø1-1/2 Max. Deck Hole Openings