

### Specifications

#### Features

- 1.5 GPM Flow Rate
- 1 or 3-Hole Installation; Deck Plate or Single Hole Mounting Option
- High Arc Spout
- Mounting Hardware Included
- PVD Finish
- Push & Seal™ Pop-Up
- Pforever Seal Ceramic Disc Valves
- Pforever Warranty®


#### Code Compliance

Pfister products are designed and manufactured in compliance with the following standards and codes:

- IAPMO Certified
- CSA B125 Certified
- ASME A112.18.1
- NSF 61/9 Annex G (Low lead)
- Cal Green Complaint
- EPA WaterSense Certification 1.5 gpm, 5.7 L/Min



### Dimensions

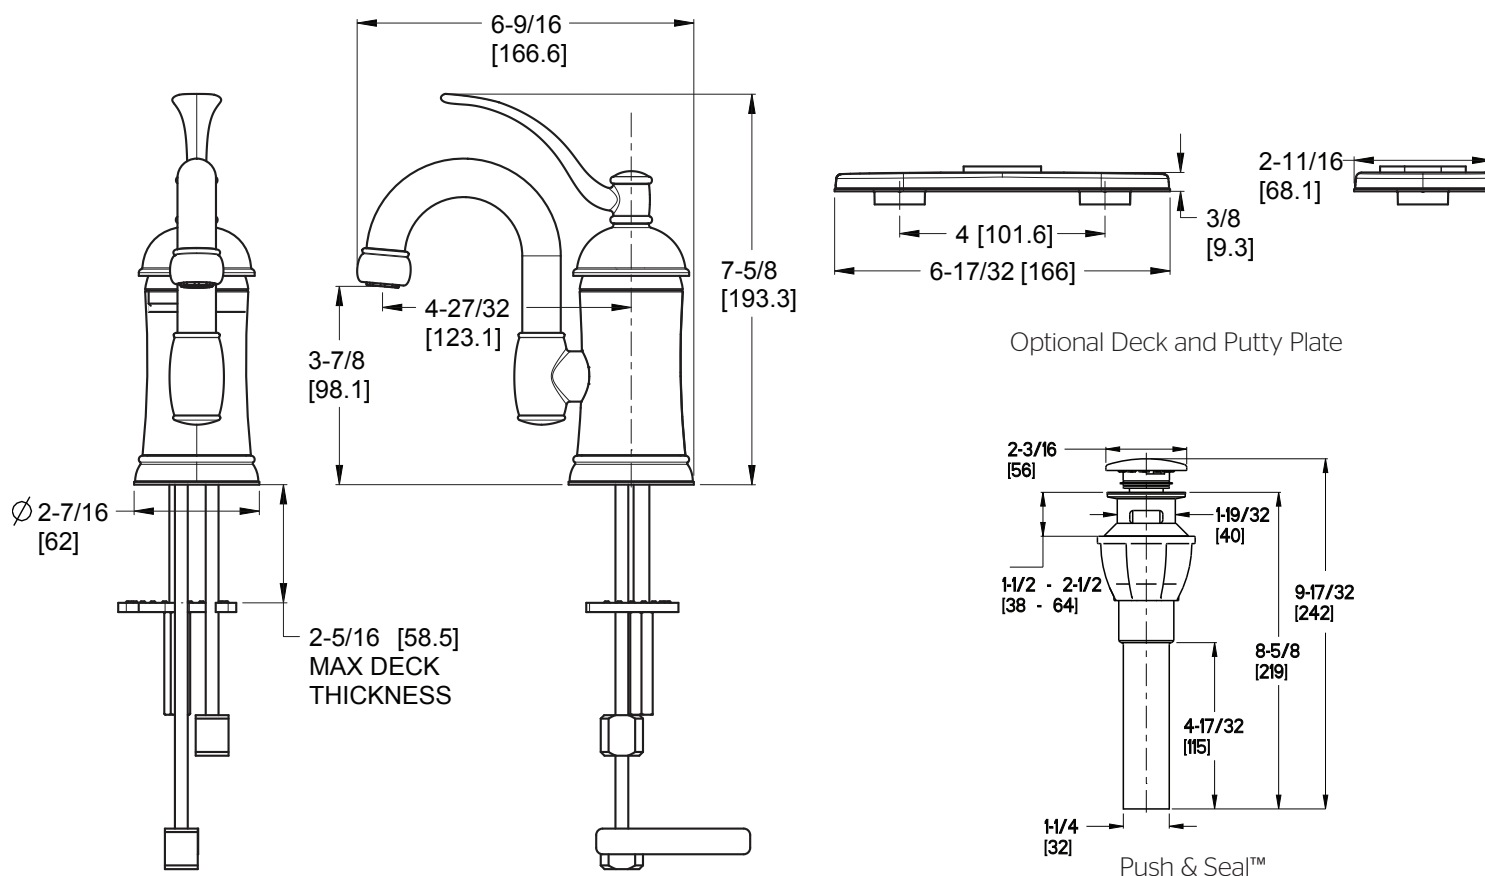

$\varnothing$ 1 Min to  $\varnothing$ 1-1/2 Max. Deck Hole Openings