


F529-7RYB Finish(B) ☐

F529-7RYC Finish(C)\* ☐

F529-7RYS Finish(S)\* ☐

\*International Only

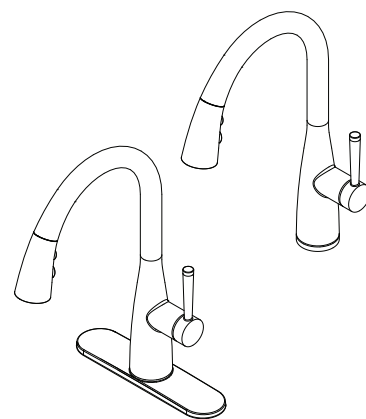

## Specifications

### Features

- 1.8 GPM Flow Rate
- 1 or 3-Hole Installation; Deck Plate or Single Hole Mounting Option
- 3 Function Pull-Down Sprayer
- AutoDock™
- EZ Clean™
- 360° Rotating Spout
- High Arc Spout
- Mounting Hardware Included
- Quick Install Tool
- Soap Dispenser Included
- TiteSeal™ Deckplate
- Pforever Seal Ceramic Disc Valve
- Pforever Warranty®


### Code Compliance

Pfister products are designed and manufactured in compliance with the following standards and codes:


- IAPMO Certified
- CSA B125 Certified
- ASME A112.18.1
- NSF 61/9 Annex G (Low lead)
- Cal Green Compliant
- ADA Compliant-ANSI A117.1 (Lever handles only)




## Dimensions

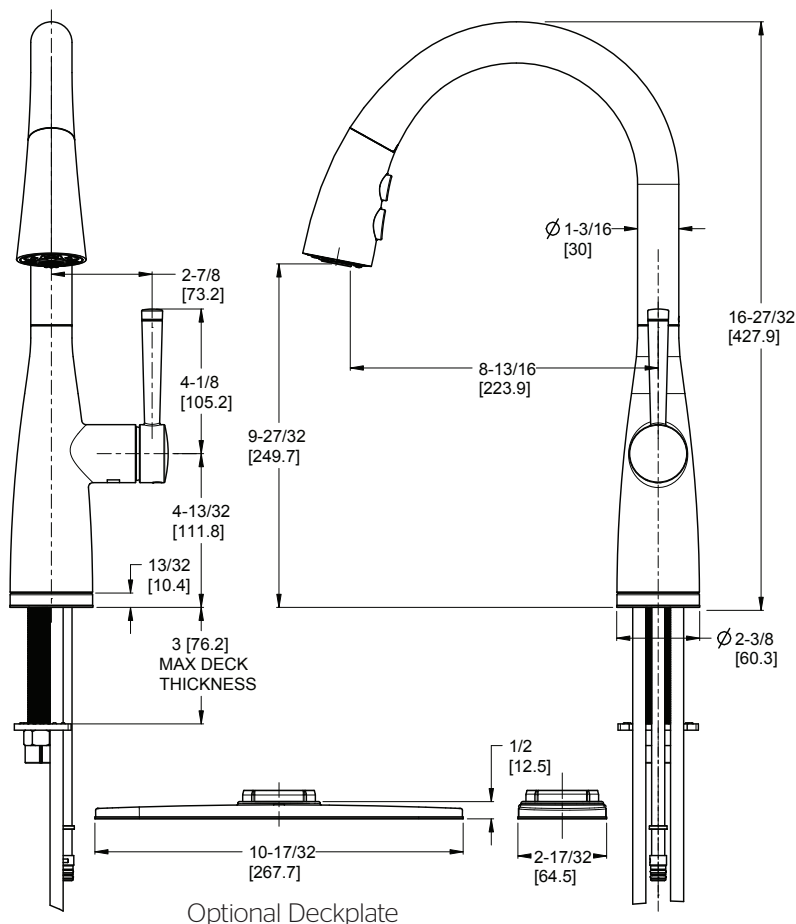

### Top Filling Soap Dispenser

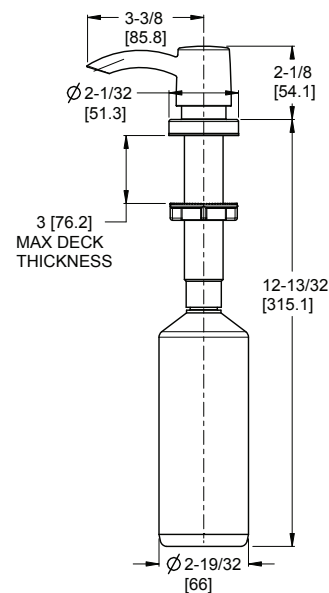

### 36 Inch Supply Lines with 3/8 Female Compression Brass Connections



$\varnothing$ 1-3/8 Min to  $\varnothing$ 1-1/2 Max. Deck Hole Openings