

BALDWIN®

LEVERS




RESERVE™

BALDWIN®


LEVERS



Curve
(CUR)




Decorative
(DEC)




Square
(SQU)



Arch
(ARC)



Federal
(FED)




Tube
(TUB)



Taper
(TAP)

LEVER SPECIFICATIONS

Door Preparation	2-1/8" cross bore. 1" edge bore for latch.
Door Thickness	1-3/8" to 2" standard. Thick door optional for doors up to 2-1/2".
Cylinder	Baldwin 5-pin C-Keyway.
Backset	Adjustable 2-3/8" or 2-3/4".
Front & Latch	Square Corner Adjustable (SL) standard. Round Corner (RL), Drive In (DL), or 6 Way Adjustable (6L) optional.
Strike	Square Corner (SS) standard. Round Corner (RS), or Dual Strike (DS) optional. Extended Lip strike shipped with all thick door locks (ES).
Latch Bolt	1/2" passage/privacy/entry function bolt.
Handing	With exception to half dummy function, all levers are reversible for right or left hand doors.
ANSI/BHMA	Tested to exceed ANSI/BHMA Grade 2 security.
ADA	Passage levers meet ADA requirements.
UL	20-minute certified UL option available.

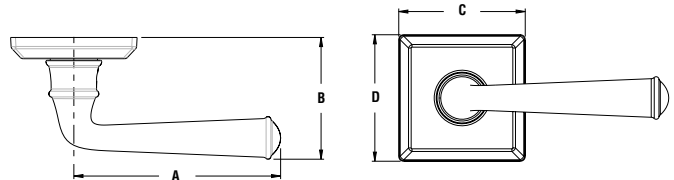

LEVER DIMENSIONS

	CUR	DEC	FED	SQU	TUB	ARC	TAP
A	3-31/32"	4-1/4"	4-1/4"	4-1/4"	4-1/4"	4-1/2"	4-1/4"
B	2-17/32"	2-3/4"	2-1/2"	2-3/8"	2-9/32"	2-9/16"	2-7/16"
B (Keyed)	2-13/32"	2-9/16"	2-9/16"	2-3/16"	2-3/16"	2-3/8"	2-1/4"


ROSE DIMENSIONS

	TAR	TRR	TSR	CRR	CSR	RAR	RSR
C	2-21/32"	2-9/16"	2-19/32"	2-9/16"	2-9/16"	2-11/16"	2-5/8"
D	3-7/16"	2-9/16"	2-19/32"	2-9/16"	2-9/16"	4-1/2"	4"


FUNCTIONS



Passage
(PS)



Privacy
(PV)



Keyed Entry
(EN)




Full Dummy
(FD)



Half Dummy
(HD)


FINISHES




003
Polished
Brass



049
Matte Brass
& Black



112
Venetian
Bronze



141
Polished
Nickel




150
Satin
Nickel



152
Matte Antique
Nickel



260
Polished
Chrome



481
Dark
Bronze



492
White
Bronze

LIMITED LIFETIME MECHANICAL • 25-YEAR FINISH WARRANTY