

BALDWIN®

DEADBOLTS



RESERVE™

# BALDWIN®

## DEADBOLTS



Traditional Arch  
(TAD)



Traditional Round  
(TRD)



Traditional Square  
(TSD)



Contemporary Round  
(CRD)



Contemporary Square  
(CSD)




Rustic Arch  
(RAD)



Rustic Square  
(RSD)

### DEADBOLT SPECIFICATIONS

|                  |   |
|------------------|---|
| Door Preparation | 2-1/8" cross bore. 1" edge bore for latch.  |
| Door Thickness   | 1-3/4" to 2" standard. Thick door optional for doors up to 2-1/2".<br>1-3/8" to 1-3/4" thin door option available for Traditional and Contemporary styles only. Thin door option not available with Rustic Deadbolt styles. |
| Cylinder         | Baldwin 5-pin C-Keyway standard. SmartKey® Re-key Technology optional.  |
| Backset          | Adjustable 2-3/8" or 2-3/4".  |
| Front & Latch    | Square Corner Adjustable (SL) standard. Round Corner (RL), Drive In (DL), or 6 Way Adjustable (6L) optional.  |
| Strike           | Square Corner (SS) standard. Round Corner (RS), Dual Strike (DS), or Full Lip Strike (FS) optional.   |
| Latch Bolt       | Deadbolt features 1" throw brass bolt.  |
| Handing          | Handing not required.   |
| ANSI/BHMA        | Tested to exceed ANSI/BHMA Grade 2 security.  |
| ADA              | N/A   |
| UL               | 20-minute certified UL option available.  |

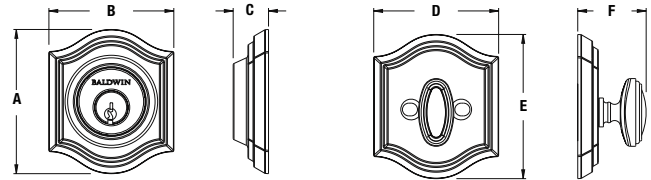

### DEADBOLT DIMENSIONS

|        | TAD      | TRD      | TSD     | CRD      | CSD     | RAD      | RSD     |
|--------|----------|----------|---------|----------|---------|----------|---------|
| A      | 3-1/16"  | Ø 2-3/5" | 2-3/5"  | Ø 2-5/8" | 2-9/16" | 3-5/8"   | 3-1/8"  |
| B      | 2-11/16" | N/A      | 2-3/5"  | N/A      | 2-9/16" | 2-11/16" | 2-9/16" |
| C      | ¾"       | ¾"       | ¾"      | ¾"       | ¾"      | 1-1/16"  | 1-1/16" |
| D      | 2-11/16" | Ø 2-5/8" | 2-5/8"  | Ø 2-5/8" | 2-5/8"  | 2-11/16" | 2-5/8"  |
| E      | 3-1/16"  | N/A      | 2-5/8"  | N/A      | 2-5/8"  | 3-7/16"  | 2-5/8"  |
| F (SC) | 1-7/16"  | 1-7/16"  | 1-7/16" | 1-7/16"  | 1-7/16" | 1-7/16"  | 1-7/16" |
| F (DC) | ¾"       | ¾"       | ¾"      | ¾"       | ¾"      | 1-1/16"  | 1-1/16" |

### FINISH AVAILABILITY

|     | 003 | 049 | 112 | 141 | 150 | 152 | 190 | 260 | 481 | 492 |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| TAD | •   | •   | •   | •   | •   | •   | •   | •   |     |     |
| TRD | •   | •   | •   | •   | •   | •   | •   | •   |     |     |
| TSD | •   | •   | •   | •   | •   | •   | •   | •   |     |     |
| CRD |     |     |     | •   | •   | •   | •   | •   |     |     |
| CSD |     |     |     | •   | •   | •   | •   | •   |     |     |
| RAD |     |     |     |     |     |     |     |     | •   | •   |
| RSD |     |     |     |     |     |     |     |     | •   | •   |

### FUNCTIONS



Single Cylinder  
(SC)



Double Cylinder  
(DC)

### FINISHES



LIMITED LIFETIME MECHANICAL • 25-YEAR FINISH WARRANTY