


LG142-0600 Finish(C)

LG142-060K Finish(K)

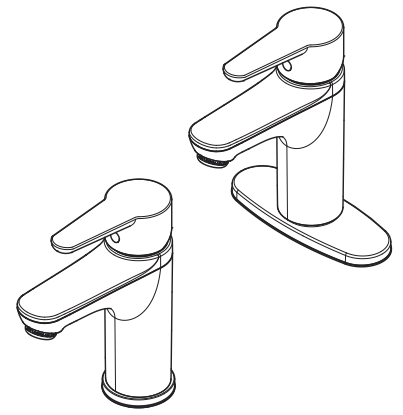

Specifications


Features

- 1.2 GPM Flow Rate
- 1 or 3-Hole Installation; Deck Plate or Single Hole Mounting Option
- Optional Deckplate, Must Order 961-217*
- Push & Seal™ Pop-Up, also Drilled for Pop-Up
- Push & Seal™ Pop-Up, also Drilled for Pop-Up
- Push & Seal™ Pop-Up, also Drilled for Pop-Up
- Push & Seal™ Pop-Up, also Drilled for Pop-Up
- Pforever Seal
- Pforever Seal Ceramic Disc Valve
- Pforever Warranty®

Code Compliance

Pfister products are designed and manufactured in compliance with the following standards and codes:

- IAPMO Certified
- CSA B125 Certified
- ASME A112.18.1
- Cal Green Compliant
- CEC Compliant
- NSF 61/9 Annex G (Low lead)
- ADA Compliant-ANSI A117.1 (Lever handles only)



Dimensions

