

BOND MORTAR

Superior Bond Mortar is a premium non-sag thinset with high latex content designed to prevent tile slippage when used on a vertical or horizontal surfaces. Bond Mortar is ideal for use with heavy or large walls tiles and is great for back splashes.

Key Features

- Interior and exterior use
- Excellent non-sag properties, perfect for wall applications
- Premium multi-purpose, versatile thinset
- Great for installation over exterior grade plywood or masonry surfaces
- Easy to mix and apply; smooth and easy to install
- Meets or exceeds ANSI standards 118.4 and 118.11

Installation

Sizes: 50 lb. bag

Colors: White

Mixing Ratio: 5 - 6 qts. of water per 50 lb.

Coverage: Approx. 80 sq. ft. per 50 lb.

- 1/4" sq. notch trowel: 75 sq. ft.
- 3/8" sq. notch trowel: 60 sq. ft.
- 1/2" sq. notch trowel: 30 sq. ft.

Performance

Open Time: 20 - 30 minutes

Working Time: 20 - 30 minutes

Pot Life: Approx. 3 hours

Shelf Life: 15 months. Store in cool, dry location.

Related Products


- Spiral Mixer 24"
- Bucket 3.5 Gal | 6 Gal
- Margin Trowel

Steps to Using Bond Mortar

- ① Use approx. 5 - 6 qts. of clean water per 50 lb. of powder.
- ② Pour powder into the bucket of water until the water forms a ring around the powder.
- ③ Use a spiral mixer to mix the thinset to a "peanut butter" consistency. Let it slake for 5 minutes, then mix again.
- ④ Use product within pot life. Do not re-temper*. If thinset is no longer workable, discard the thinset and mix a new batch.

*Add additional water and re-mix after initially activating product.

[Always add powder into liquid when mixing.]

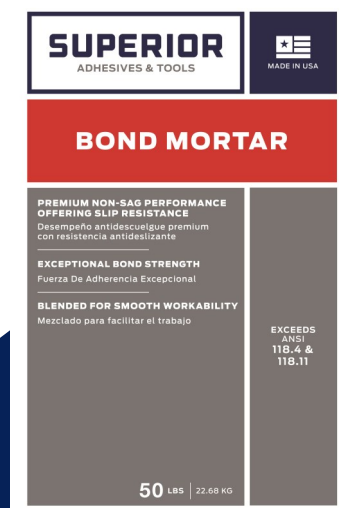

SUPERIOR
ADHESIVES & TOOLS

03.19.2024

<https://www.tileshop.com/superior-adhesives-and-tools>