

# PRO-EXCEL 100% SILICONE CAULK

Superior Pro-Excel 100% Silicone Caulk is a premium, 100% silicone formula professional workability, flexural strength and resistance to a broad spectrum of fungal, algal and bacterial growth.

## Key Features

- Use for interior and exterior applications
- Premium adhesion and non sag or slump qualities that is very easy to tool and smooth
- Long lasting and flexible; ability to be submerged in water within 24 hours
- Non-staining and non-yellowing; UV light, Stain, mold and mildew resistant
- Available in a variety of colors

## Installation

**Packaging:** 10.5 oz.

**Coverage:** Approx. 25 linear feet\*

**Cure Time:** 24 hours

**Shelf Life:** 12 months, unopened. Store in a cool, dry location  
Do not expose to direct sunlight

## Related Products


- Caulk Gun
- Putty Knife or Spatula
- Painter's Tape

## Application Tips

- Clean and let surface dry completely before application
- Refrain from using if rain or moisture is expected within 24 hours of application
- Always test products in an inconspicuous area prior to general use
- Avoid contact with skin. If contact occurs, wash with soap and water
- To achieve a small bead, cut further up the nozzle; to achieve a wider caulk line, cut further down the nozzle
- Use and store caulk between 40° and 90° F
- Approximate coverage varies based on conditions, tile textures and installation methods

## Steps to Apply Caulk

- ① Surfaces should be dry and free of adhesives, paint, wax, dirt, grease and any other foreign materials that may inhibit bonding. Allow surface to dry completely before application of caulk.
- ② Use painter's tape to areas around joint where caulk should not appear to give you a straight line of caulk improving final appearance.
- ③ Cut the nozzle in the proper location to achieve the desired bead size.
- ④ Hold the tube at a 45° angle to the joint being filled and pull the caulk gun along the joint to create an even bead.
- ⑤ Once applied, tool the bead of caulk with a putty knife. Wipe away excess caulk with a damp rag. Allow caulk to full dry in approximately 24 hours.

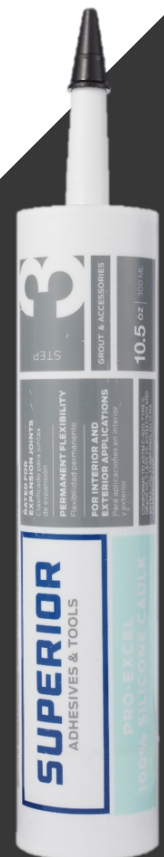

**SUPERIOR**  
ADHESIVES & TOOLS