Canon

imageRUNNER ADVANCE DX C568iF/C568iFZ C478iF/C478iFZ

imageRUNNER ADVANCE DX C568iF Series

Color Compact Multifunction

Print up to 60 ppm (BW/color)

Scan up to 200 ipm (300 dpi) (BW/color, duplex)

Print up to 8-1/2" × 14"

2,300-sheet maximum paper capacity

Canon's comprehensive portfolio of imageRUNNER ADVANCE DX multifunction printers and integrated solutions can help **simplify** the end user experience and management of technology, better **control** sensitive information and print-related costs, and help ensure that technology investments proactively **evolve** with changing needs.



WORKFLOW EFFICIENCY

- 10.1" intuitive touch screen with smartphonelike usability.
- A unique, customized experience tailored to individual preferences using My ADVANCE.
- Supports mobile solutions and integration with many popular cloud services like Google Drive.¹
- Scan and convert documents to searchable digital files in a variety of file formats.
- Integration with Canon and various third-party software with embedded application platform.
- Hot Folders allow users to drag and drop a file into a hot folder and automatically print with predefined settings such as number of copies and finishing requirements.
- Easily scan to, and print from, cloud services or email directly from the device User Interface.*



- SECURITY
- Advanced standard security feature set to help safeguard sensitive information and assist in regulatory compliance.
- Integrates with existing, third-party SIEM^{**2} systems to help provide real-time, comprehensive insights into potential threats to the network and printers.
- Technology to verify that the device boot process, firmware, and applications initialize without alteration at startup. Trellix™
 Embedded Control³ utilizes a whitelist to protect against malware and tampering of firmware and applications.
- Security policy settings can be controlled with a dedicated password, configured from a central location, and exported to other supported devices.
- Control access to the device and specific features, using a host of flexible authentication methods—PIN code, user name/password, or card access.⁴



QUALITY AND RELIABILITY

- Canon's signature reliability and engine technologies help keep productivity high and minimize the impact on support resources.
- Outstanding imaging technologies and toner allow for consistently striking images, thanks to Canon's V² color profile.
- Designed to achieve maximum uptime with status notifications that help keep supplies replenished plus intuitive maintenance videos for consumables replacement.
- imageRUNNER ADVANCE models have received many awards and recognition from leading industry analysts, often referencing strong reliability.

** Security Information and Event Management.

^{*} Optional Cloud Connector term license required.



- Designed for quick, easy deployment.
- Remote diagnostics and parts life management for proactive maintenance and rapid fixes.
- Easy and intuitive to monitor device status and consumable levels, turn off devices remotely, observe meter readings, manage settings, and implement security policies.
- Common firmware and regular updates with Unified Firmware Platform (UFP) for continuous improvements and consistency across a fleet.



COST MANAGEMENT

Implement the optional uniFLOW Online cloudbased solution for full accounting and reporting for compatible Canon and third-party devices. Features include the following:⁵


- Track and assess print, copy, and scan usage and allocate costs to departments or projects.
- Apply print policies and restrict usage by user to help reduce unnecessary printing and contribute to cost efficiency.
- A centralized dashboard with up-to-theminute insights into printer activity.

SUSTAINABILITY

- A combination of fusing technologies and low-melting-point toner minimizes power requirements and helps achieve low energy consumption.
- Encourage environmentally conscious work practices by enabling multiple settings that can help save paper and energy.
- ENERGY STAR[®] certified, registered as EPEAT[®] Gold, also attained EPEAT Climate+.⁶

CONFIGURATION OPTIONS

imageRUNNER ADVANCE DX C568iF Series

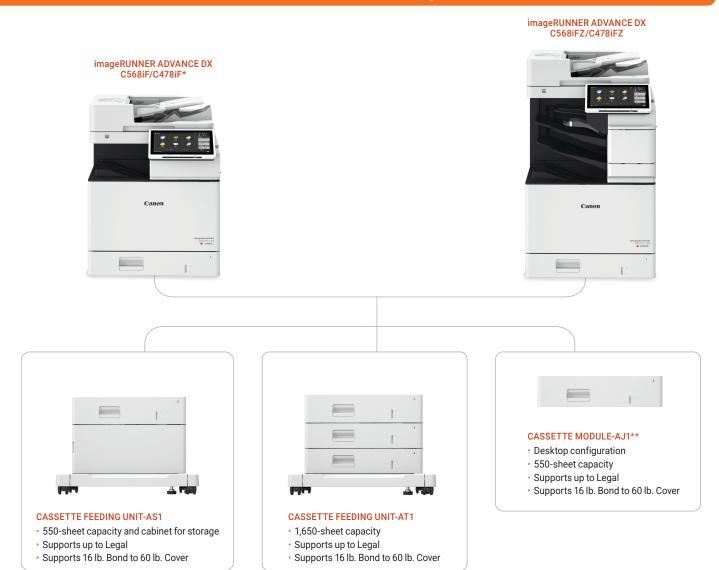

* Finisher cannot be added after purchase.

** Up to two optional cassettes can be added to the iF model. One optional cassette can be added to the iFZ model. Applies to floor standing and desktop configurations.

Main Unit

Туре

Color Laser Multifunctional Core Functions Print, Copy, Scan, Send, Store, Fax Processor

1.75 GHz Dual Core Processor

Control Panel

10.1" TFT LCD WSVGA Color Touch-panel

Memory 4.0 GB RAM

Solid State Drive

256 GB

Interface Connection

Network:	1000Base-T/100Base-TX/10Base-T,
	Wireless LAN (IEEE 802.11 b/g/n)
Optional:	Bluetooth Low Energy
Others	
Standard:	USB 2.0 (Host) x2, USB 3.0 x1 (Host),
	USB 2.0 x1 (Device)
Optional:	Copy Control Interface
Paper Capac	ty (LTR, 20 lb. Bond)

Standard: 650 Sheets Maximum: 2,300 Sheets

Paper Sources (LTR, 20 lb. Bond)

. apo. ooa.oo.	() _0
Standard:	550-sheet Paper Cassette,
	100-sheet Multi-Purpose Tray
Optional:	1,650-sheet Paper Cassette
	(Cassette Feeding Unit-AT1)
	550-sheet Paper Cassette
	(Cassette Feeding Unit-AS-1)

(ousselle recalling offic Ao T)	
Paper Output Capacity (LTR, 20 lb. Bond)	
Standard	

400 Sheets
900 Sheets (400 sheets: base tray, 400
sheets: upper tray, 100 sheets: lower tray)

Finishing Capabilities

Standard: Finisher:	Collate, Group Collate, Group, Offset, Staple	
Supported Media Types		
Multi-Purpose	Thin, Plain, Recycled, Heavy, Color,	
Tray:	Bond, Envelope, Letterhead	
Cassette:	Thin, Plain, Recycled, Heavy, Color,	

Supported Media Sizes

Multi-Purpose	Legal, Letter, Executive, Statement,
Tray:	Envelopes [No.10 (COM10), Monarch, DL,
	ISO-C5], Custom size: 3" x 5" to 8-1/2" x 14"
	(76.2 x 127.0 mm to 216.0 x 355.6 mm)
Cassette:	Legal, Letter, Executive, Statement,
	Custom Size: 4" x 5-7/8" to 8-1/2" x 14"
	(101.6 x 148.0 mm to 216.0 x 355.6 mm)

Label Bond Letterhead

Supported Media Weights

Cassettes: 16 lb. Bond to 60 lb. Cover (60 to 163 g/m²) Multi-Purpose

may.	10 ID. BOIID 10 79 ID. COVEL (60 10 2 10 g/11-)	
Duplex:	16 lb. Bond to 60 lb. Cover (60 to 163 g/m ²)	
Print/Copy Speed (BW and Color)		
0560:57		

C568iF/

C568iFZ:	Up to 60 ppm (Letter), Up to 47 ppm (Legal)
C478iF/	
C478iFZ:	Up to 50 ppm (Letter), Up to 39 ppm (Legal)

Warm-up Time

From Power On: Approx. 10 Seconds⁷ From Sleep Mode: Approx. 10 Seconds⁸ Quick Startup Mode: Approx. 4 Seconds⁹ Dimensions (W x D x H)

Standard20-1/2" x 25-1/4" x 26-3/8"Model:(521 mm x 642 mm x 668 mm)

 Finisher
 20-1/2" x 25-1/4" x 34"

 Model:
 (521 mm x 642 mm x 864 mm)

Installation Space (W x D)

37-3/8" x 33-1/8" (950 mm x 840 mm) (with Left Cartridge Door Open + Right Door Open + the Cassette Drawer Open)

Weight¹⁰ Standard

Model: Approx. 101.4 lb. (46 kg) Finisher Model: Approx. 121.3 lb. (55 kg)

Print Specifications

Print Resolution (dpi) Up to 1200 x 1200 (equivalent) Standard Page Description Languages UFR II, PCL6, Adobe[®] PostScript[®] 3[™]

Direct Print

Available from USB, Advanced Box, Remote UI, and Web Access

Supported File Types PDF, TIFF, JPEG, EPS, XPS

Printing from Mobile Devices

and Cloud-based Services

A range of standard and optional software and MEAPbased solutions¹ (including Cloud Connector, AirPrint, Mopria, Universal Print by Microsoft[®], Canon PRINT Business, and uniFLOW Online⁵) are available to provide printing from mobile devices or Internet-connected devices and cloud-based services depending on your requirements. Please contact your sales representative for further information.

Fonts

PCL:	93 Roman, 10 Bitmap fonts, 2 OCR fonts,
	Andalé Mono WT J/K/S/T (Japanese,
	Korean, Simplified and Traditional
	Chinese), ¹¹ Barcode Fonts ¹²
PS:	136 Roman

Operating System¹³

operating of	
UFRII/PS:	Windows [®] 8.1/10/Server 2012/Server 2012
	R2/Server 2016/Server 2019,
	Mac OS X(10.11 or later)
PCL:	Windows 8.1/10/Server 2012/Server 2012
	R2/Server 2016/Server 2019
PPD:	Windows 8.1/10, Mac OS X(10.10 or later)

Copy Specifications

First-Copy-Ou	ıt Time (LTR)
C568iF/	
C568iFZ:	Approx. 4.4/5.2 seconds or less
C478iF/	
C478iFZ:	Approx. 5.1/5.8 seconds or less
Copy Resolut	ion (dpi)
600 x 600	
Multiple Copi	es
Up to 9,999	
Magnification	1
25 to 400% (1%	5 Increments)
Preset Reduc	tions/Enlargements
25%, 50%, 64%	, 78%, 100% (1:1), 129%, 200%, 400%

Scan Specifications

Туре

Single-Pass Duplexing Automatic Document Feeder¹⁴ Document Feeder Paper Capacity

Up to 100 Sheets (20 lb. Bond)

Document Feeder Supported Media Sizes Legal, Letter, Statement, Custom Size: 1-7/8" x 5" to 8-1/2" x 14" (48.0 mm x 128.0 mm to 216.0 mm x 355.6 mm), Business Card: 1-7/8" x 3-3/8" to 2-1/8" x 3-5/8" (48.0 mm x 85.0 mm to 55.0 mm x 91.0 mm)

Document Feeder Supported Media Weights

 Single-Sided
 13.3 to 34 lb. Bond (50 to 128 gsm) (BW);

 Scanning:
 17 to 34 lb. Bond (64 to 128 gsm) (CL)

 Double-Sided
 13.3 to 34 lb. Bond (50 to 128 gsm) (CL)

 Scanning:
 17 to 34 lb. Bond (50 to 128 gsm) (BW);

 Scanning:
 17 to 34 lb. Bond (50 to 128 gsm) (CL)

 Business Card:
 21.3 lb. Bond to 80 lb. Cover (80 to 220 gsm)

Platen Acceptable Originals Sheet, Book

Pull Scan

 Windows 8.1/10/Server 2012/Server 2012

 OS:
 R2/Server 2016

Scan Resolution (dpi)

Scan for Copy: 600 x 600 Scan for Send: (Push) 600 x 600 (SMB/FTP/WebDAV/ IFAX), (Pull) 600 x 600 Scan for Fax: 600 x 600

Scan to Mobile Devices and Cloud-based Services

A range of solutions is available to provide scanning to compatible mobile devices and certain cloud-based services depending on your requirements.

Scan Speed (LTR)

Send:	Automatic Color Select "OFF" (300 x 300 dpi): Single-Sided Scanning: 100 ipm Double-Sided Scanning: 200 ipm Automatic Color Select "ON" (300 x 300 dpi): Single-Sided Scanning; 50 ipm
	Double-Sided Scanning: 100 ipm
Сору:	Scan Speed Priority (300 x 600 dpi): Single-Sided Scanning: 50 ipm Double-Sided Scanning: 100 ipm Image Quality Priority (600 x 600 dpi): Single-Sided Scanning: 30 ipm Double-Sided Scanning: 50 ipm

Send Specifications

Destination

Destination		
Standard:	Email/Internet Fax (SMTP), SMB v3.0, FTP, WebDAV, Mail Box, Super G3 Fax	
Optional:	IP Fax	
Address Book		
LDAP (2,000)/Local (1,600)/Speed Dial (200)		
Send Resolution (dpi)		
Push:	Up to 600 x 600	
Pull:	Up to 600 x 600	
Communication Protocol		
File:	FTP (TCP/IP), SMB v3.0, WebDAV	
Email:	SMTP, POP3	
File Format		

File Forma

TIFF, JPEG, PDF (Compact, Searchable, Apply policy, Optimize for Web, PDF A/1-b, Trace & Smooth, Encrypted, Device Signature, User Signature), XPS (Compact, Searchable, Device Signature, User Signature), Office Open XML (PowerPoint, Word)

Fax Specifications

Maximum Number of Connection Lines

 Modem Speed

 Super G3:
 33.6 Kbps

 G3:
 14.4 Kbps

Compression Method

MH, MR, MMR, JBIG

Resolution (dpi)

400 x 400 (Ultra Fine), 200 x 400 (Super Fine), 200 x 200 (Fine), 200 x 100 (Normal)

Sending and Recording Size

Statement to Legal

Fax Memory Up to 30,000 Pages (2,000 jobs)

Speed Dials Max. 200

Group Dials/Destinations

Max. 199 Dials

Sequential Broadcast

Max. 256 Addresses

Memory Backup

Yes

imageRUNNER ADVANCE DX C568iF Series

Store Specifications

Mail Box Simple (Number Supported)

100 User In-boxes, 1 Memory RX In-box, 50 Confidential Fax In-boxes, Maximum 10,000 Pages (2,000 jobs) Stored

Advanced Box

Communication		
Protocol:	SMB or WebDAV	
Supported		
Client PC:	Windows 8.1/10	
Concurrent Connections (Max.)		
SMB:	64	
WebDAV:	3 (Active Sessions)	
Advanced Box Available Disc Space		

Approx. 16 GB

Security Specifications

Authentication		
Standard:	Universal Login Manager (Device and Function Level Log-in), User Authentication, Department ID Authentication, Access Management System	
Optional:	uniFLOW Online/uniFLOW ⁵	
Data		
Standard:	Trusted Platform Module (TPM), SDD Password Lock, SDD Initialize, Mail Box Password Protection, SSD Data Encryption (FIPS140-3 Validated), Verify System at Startup, ³ Runtime Intrusion Detection with Trellix Embedded Control ³	
Network		
Standard:	IP/Mac Address Filtering, IPSEC, TLS Encrypted Communication (v1.0/1.1/1.2/1.3), SNMP V3.0, IEEE 802.1X, IPv6, SMTP Authentication, POP Authentication before SMTP, S/MIME, SIEM Integration	
Document		
Standard:	Secure Print, Adobe LiveCycle® Rights Management ES2.5 Integration, Encrypted PDF, Encrypted Secure Print, Device Signature, User Signatures,	

Secure Watermark

Environmental Specifications

Operating Environment Temperature: 50 to 86 °F 20 to 80% RH (Relative Humidity) Humidity: **Power Requirements** C568iF/ C568iFZ 110 V-127 V, 60 Hz, 10 A C478iF/ C478iFZ: 110 V-127 V, 60 Hz, 8.4 A Plug (Main Unit) **NEMA 5-15P Power Consumption** Approx. 1,500 W Maximum: Standby: Approx. 49 W¹⁵ Approx. 1.0 W¹⁶ Sleep Mode: Typical Electricity Consumption (TEC) Rating¹⁷ C568iF/ C568iFZ: 0 67 kWh C478iF/ C478iFZ 0.54 kWh Standards ENERGY STAR® Certified Rated EPEAT® Gold , EPEAT Climate +6

imageRUNNER ADVANCE DX C568iF Series

Consumables

 Toner Cartridge

 TONER T04 BK/C/M/Y18

 Toner Yield

 TONER T04 BK: 33,000 Pages¹⁹

 TONER T04

 C/M/Y:
 27,500 Pages¹⁹

- ¹ Subscription to a third-party cloud service required. Subject to third-party cloud service provider's Terms and Conditions.
- ² Third-party SIEM system required. Subject to third-party SIEM system's Terms and Conditions. Canon cannot ensure compatibility with all third-party SIEM systems.
- ³ This feature is off by default and must be turned on by the user. Warm-up times are affected once turned on.
- ⁴ Requires additional option.
- ⁵ Requires uniFLOW Online or uniFLOW. uniFLOW is available for education and government customers with prior approval.
- ⁶ For current EPEAT rating (Gold/Silver/Bronze), please visit www.epeat.net.
- ⁷ Time from device power-on until copy ready (not print reservation).
- ⁸ Time from exiting Sleep mode to when printing is operational.
- ⁹ Time from device power-on to when copy jobs can be programmed.
- ¹⁰Includes consumables.
- ¹¹Requires the optional PCL International Font Set-A1.
- ¹²Requires the optional Barcode Printer Kit-D1.
- ¹³Other operating systems and environments, including AS/400, UNIX, Linux, and Citrix, may be supported. Some of these solutions are chargeable. SAP Device Types are available via the SAP Market Place. For more information, contact your sales representative.
- ¹⁴Multi-Sheet Feed Detector Supported.
- ¹⁵Reference value (measured one unit).
- ¹⁶1.0 W Sleep mode not available in all circumstances due to certain settings.
- ¹⁷Based on ENERGY STAR Product Specification for Imaging Equipment Version 3.0.
- ¹⁸Toner T04L also available for BK and Color (C, M, Y). Yield is BK 11,000 images and Color 9,000 images.
- ¹⁹Toner Cartridge yield in accordance with ISO/IEC 19798.



USA.CANON.COM/SIMPLYADVANCED

F 🗙 🞯 💶 🛅



To learn about Canon's many awards, visit usa.canon.com/awards.

As an ENERGY STAR[®] Partner, Canon U.S.A., Inc. has certified these models as meeting the ENERGY STAR energy efficiency criteria through an EPA recognized certification body. ENERGY STAR and the ENERGY STAR mark are registered U.S. marks. AirPrint and the AirPrint logo are trademarks of Apple Inc. Canon, imageRUNNER, imagePASS, and the GENUINE logo are registered trademarks or trademarks of Canon Inc. in the United States and may also be registered trademarks or trademarks of Canon Inc. in the United States and may also be registered trademarks or trademarks or trademarks of Canon Inc. in the United States and may also be registered trademarks or trademarks or trademarks of Canon Inc. in the United States and may also be registered trademarks or trademarks or trademarks of Some security features may impact functionality/performance; you may want to test these settings in your environment. Nothing herein should be construed as legal or regulatory advice concerning applicable laws; customers must have their own qualified counsel determine the feasibility of a solution as it relates to regulatory and statutory compliance. Trellix and the Trellix logo are trademarks or trademarks of Musarubra US LLC or its subsidiaries in the U.S. and other countries. All other referenced product names and marks are trademarks of their respective owners. All printer output images are simulated. All features presented in this brochure may not apply to all Series and/or products and may be optional; please check with your Canon Authorized Dealer for details. Products shown with optional accessories. Canon U.S.A. does not provide legal counsel or regulatory compliance consultancy, including without limitation, Sarbanes-Oxley, HIPAA, GLBA, Check 21 or the USA Patriot Act. Each customer must have its own qualified counsel determine the advisability of a particular solution as it relates to regulatory and statutory compliance. Specifications and availability subject to change without notice. Not responsible for typographical errors. @20